



A Millimeter-Wave Cavity-Backed Suspended Substrate Stripline Antenna

Rainee N. Simons
Dynacs Engineering Company, Inc., Brook Park, Ohio

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized data bases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at (301) 621-0134
- Telephone the NASA Access Help Desk at (301) 621-0390
- Write to:
NASA Access Help Desk
NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076



A Millimeter-Wave Cavity-Backed Suspended Substrate Stripline Antenna

Rainee N. Simons
Dynacs Engineering Company, Inc., Brook Park, Ohio

Prepared for the
1999 AP-S International Symposium and USNC/URSI
National Radio Science Meeting
sponsored by the Institute of Electrical and Electronics Engineers
Orlando, Florida, July 11–16, 1999

National Aeronautics and
Space Administration

Glenn Research Center

This report contains preliminary
findings, subject to revision as
analysis proceeds.

Available from

NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076
Price Code: A03

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22100
Price Code: A03

A MILLIMETER-WAVE CAVITY-BACKED SUSPENDED SUBSTRATE STRIPLINE ANTENNA

Rainee N. Simons
Dynacs Engineering Company, Inc.
Brook Park, Ohio 44142

I. INTRODUCTION

Future generation satellite communication systems in near-Earth orbit will operate at frequencies in the higher mm-wave frequency bands. These satellite systems require low-profile, high gain, light weight and low cost antennas for communications to and from Earth as well as for inter-satellite links (ISL). At higher mm-wave frequencies, the conductor loss of conventional microstrip line is high (ref. 1) and consequently the feed network loss of patch antenna arrays is also high. The high loss lowers the array efficiency (refs. 2 and 3), and in addition lowers the G/T ratio in a receiving array. Recently a radial line slot antenna array has been demonstrated to have high gain and efficiency at 60 GHz (ref. 4). In this paper, the design, fabrication and characterization of a V-Band (50-75 GHz), cavity backed, circular aperture antenna with suspended substrate stripline (SSS) feed is presented.

II. SUSPENDED SUBSTRATE STRIPLINE FEED

The basic suspended substrate stripline (SSS) configuration is shown in figure 1. The SSS consists of a strip conductor of width W and thickness t printed on a dielectric substrate of thickness d and permittivity ϵ_r . The substrate is suspended inside a grooved metal channel of width a and height b . The SSS has several advantages: First, the attenuation is lower compared to conventional microstrip (ref. 1). Second, the effective dielectric constant is close to that of free space and hence the circuit size is large. Third, the dominant mode is a quasi-TEM mode hence dispersion is low. The disadvantage of SSS is that very low values of characteristic impedance cannot be realized. This is because the dimension a of the channel is chosen such that the waveguide modes are cut off and therefore the maximum width of the strip W is limited. To excite the array elements in equal amplitude and phase a SSS corporate feed with T-junctions and quarter wave transformers is constructed.

III. ANTENNA ELEMENT DESIGN

A cavity backed circular aperture antenna with SSS feed is shown in figure 2. The antenna element (ref. 5) consists of a thin dielectric substrate of thickness d supported between two cylindrical waveguides of axial height h_1 and h_2 . The lower waveguide is terminated in a short circuit so as to form a cavity. The radius r of the waveguide is chosen such that the dominant TE_{11} mode propagate but the next higher order TM_{01} mode is cut off. The TE_{11} mode is excited by extending the strip conductor of the SSS through an opening ($a \times b$) in the wall thus forming a probe of width W_1 and length L_1 . The probe impedance is matched to the SSS impedance by proper choice of W_1 , L_1 and the cavity height h_2 . The antenna radiates with a linear polarization along the y direction. A $N \times N$ planar array can be constructed by arranging the elements on a square lattice and exciting them with a SSS corporate feed.

IV. SUSPENDED SUBSTRATE STRIPLINE TO WAVEGUIDE TRANSITION

A SSS to rectangular waveguide transition is constructed to couple power to the array. The transition consists of a E-plane probe of length L_2 and width W_2 . The probe is coupled to the SSS strip conductor by a taper of length L_3 . Characterization of the transition is done by measuring the insertion loss and return loss of two of them in a back-to-back arrangement. Figures 3(a) and 3(b) show a schematic and a photograph of two back-to-back transitions

respectively. Figures 4(a) and 4(b) show the measured insertion loss and return loss respectively. The insertion loss is less than 1 dB and the return loss less than -10.0 dB over large part of the frequency range. Typical dimensions of the antenna and the feed are presented in table I.

V. MEASURED ANTENNA CHARACTERISTICS

The element design is validated initially by characterizing the circular aperture which has a TE_{11} mode excitation. The measured E- and H-plane radiation pattern of the circular aperture at 50.5 GHz is shown in figure 5. The beamwidth in the E- and H-plane are 63° and 50° respectively. The measured gain is about 10 dB. The measured cross polarization is below 30 dB. A 2×2 array is being fabricated and its performance will be presented at the Symposium.

VI. CONCLUSIONS

The design of a V-Band 4×4 cavity backed circular aperture array with SSS feed for potential satcom applications is presented. The measured radiation patterns of a single circular aperture shows excellent characteristics.

REFERENCES

1. T. Edwards, Foundations for Microstrip Circuit Design, 2nd ed., Chichester, England: John Wiley & Sons, 1992, Section 2.3, pp. 19–26.
2. K. Sakakibara, J. Hirokawa, M. Ando and N. Goto, “High-Gain and High-Efficiency Single-Layer Slotted Waveguide Array for use in 22 GHz Band,” Electron. Lett., vol. 32, no. 4, pp. 283–284, Feb. 1996.
3. M. Ando, T. Numata, J.-I. Takada and N. Goto, “A Linearly Polarized Radial Line Slot Antenna,” IEEE Trans. Antennas & Prop., vol. 36, no. 12, pp. 1675–1680, Dec. 1988.
4. A. Akiyama, T. Yamamoto, M. Ando and E. Takeda, “Conical Beam Radial Line Slot Antennas for 60 GHz Band Wireless LAN,” 1998 IEEE Antennas and Prop., Inter. Symp. Dig., vol. 3, pp. 1421–1424, 1998.
5. E. Rammos, “A Low Tolerance Dual Slot Radiator for Space and Ground Applications,” 1991 IEEE Antennas and Prop. Inter. Symp. Dig., vol. 3, pp. 1599–1602, 1991.

TABLE I.—TYPICAL DIMENSIONS
FOR THE ANTENNA AND FEED

Suspended substrate stripline
a = 0.074 in.
b = 0.037 in.
c = 0.09 in.
d = 0.005 in.
$\epsilon_r = 2.2$
t = 17.0 μm
Circular aperture antenna and probe feed
r = 0.0705 in.
$h_1 = 0.25$ in.
$h_2 = 0.1$ in.
$W_1 = 0.0175$ in.
$L_1 = 0.06$ in.
Rectangular waveguide-to-suspended substrate stripline transition
W = 0.04 in.
$W_2 = 0.0175$ in.
$L_2 = 0.025$ in.
$L_3 = 0.066$ in.

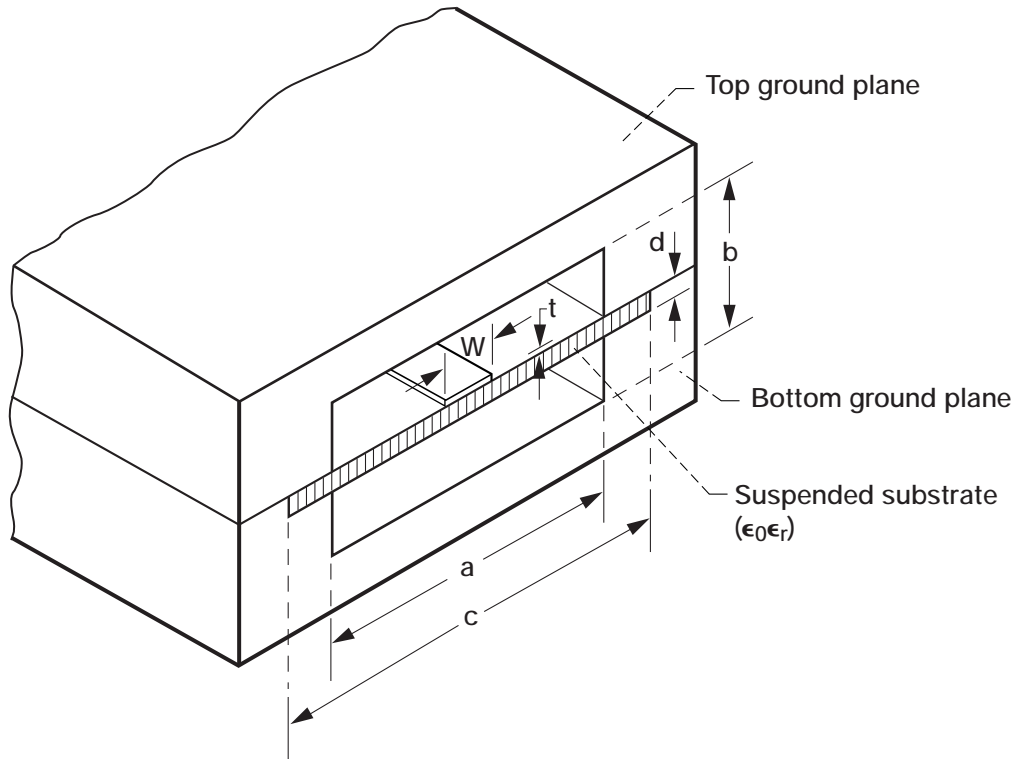


Figure 1.—Cross section of suspended substrate stripline.

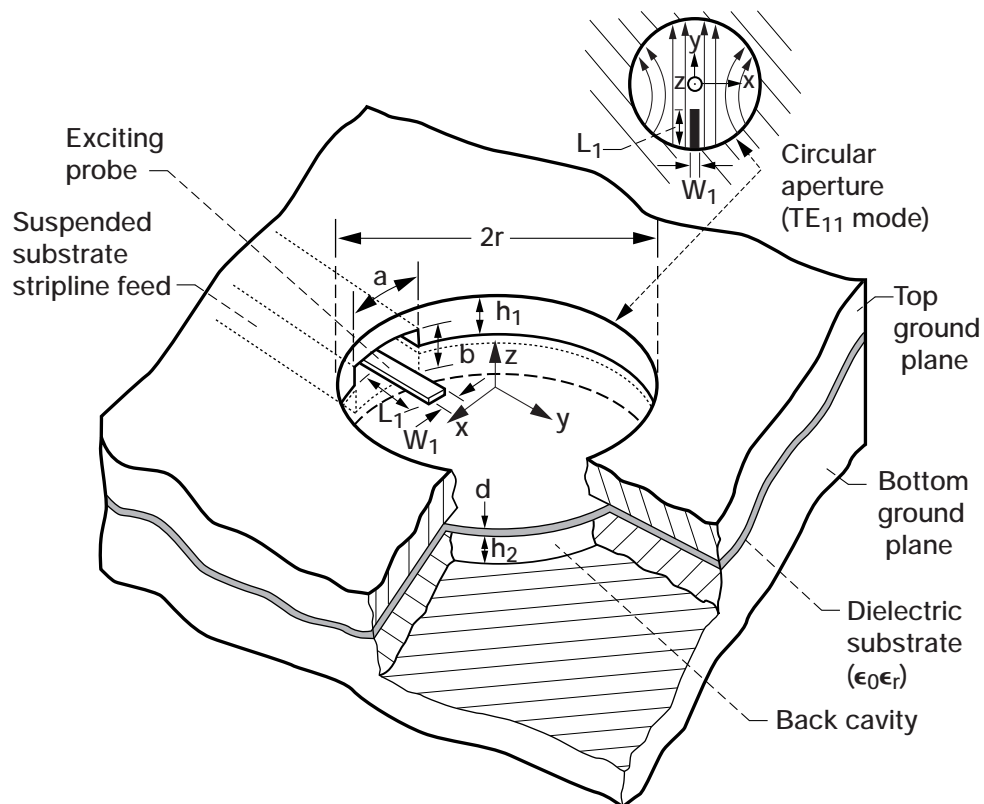


Figure 2.—Cavity backed circular aperture antenna with suspended substrate stripline probe feed.

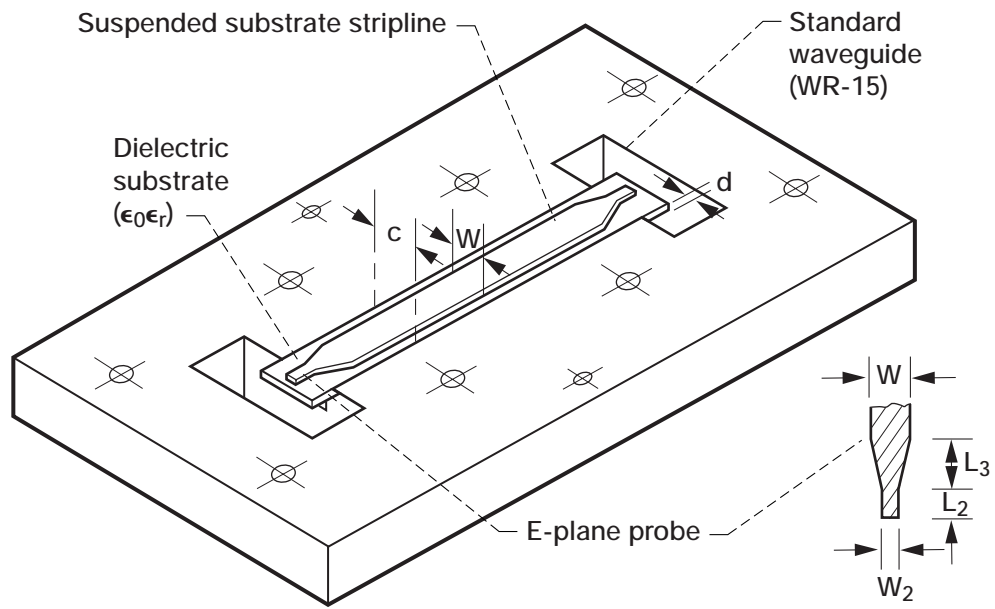


Figure 3.—(a) Back-to-back rectangular waveguide to suspended substrate stripline transition with top cover removed.

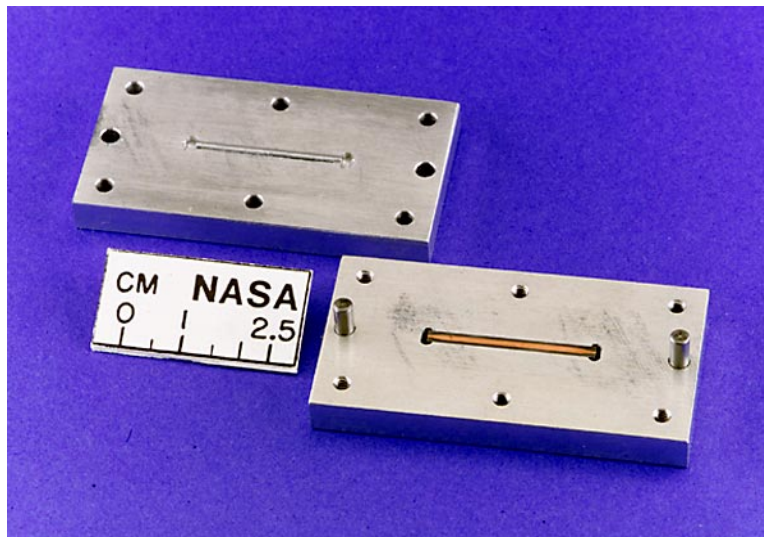


Figure 3.—(b) Photograph of two back-to-back rectangular waveguide to suspended substrate stripline transition.

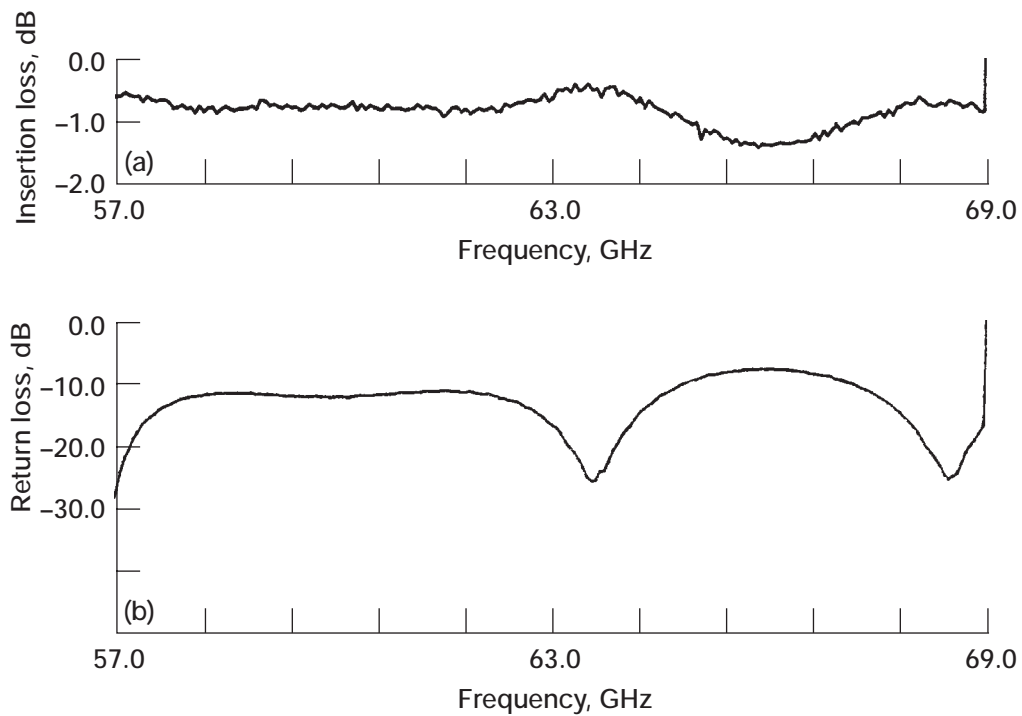


Figure 4.—Measured characteristics of the two back-to-back transitions.
(a) Insertion loss. (b) Return loss.

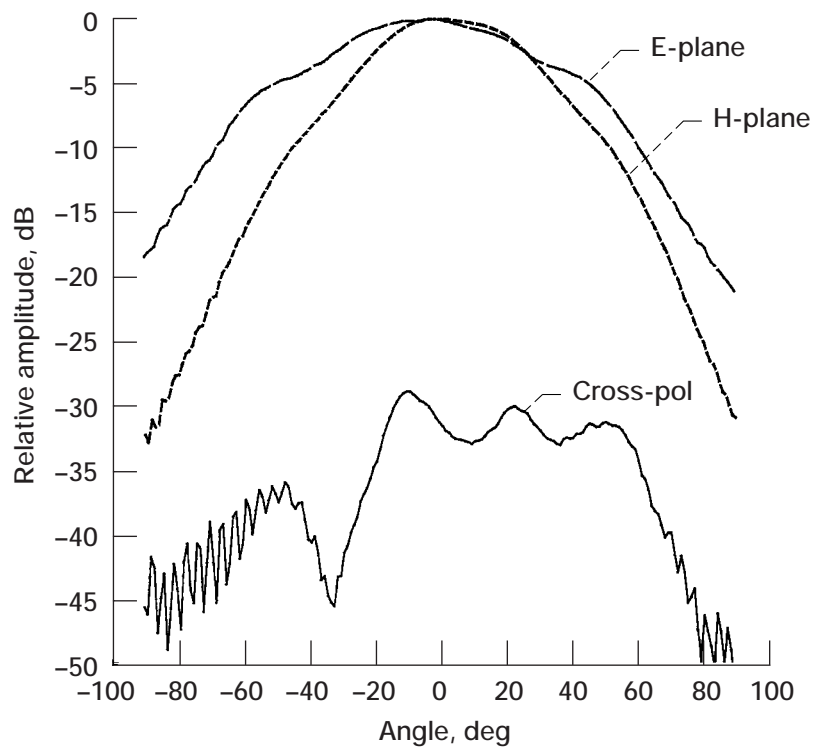


Figure 5.—Measured E- and H-plane radiation patterns and cross polarization at 50.5 GHz.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE July 1999	3. REPORT TYPE AND DATES COVERED Technical Memorandum		
4. TITLE AND SUBTITLE A Millimeter-Wave Cavity-Backed Suspended Substrate Stripline Antenna		5. FUNDING NUMBERS WU-632-50-5B-00		
6. AUTHOR(S) Raine N. Simons				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Dynacs Engineering Company, Inc. Brook Park, Ohio 44142		8. PERFORMING ORGANIZATION REPORT NUMBER E-11506		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001		10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TM-1999-209186		
11. SUPPLEMENTARY NOTES Prepared for the 1999 AP-S International Symposium and USNC/URSI National Radio Science Meeting sponsored by the Institute of Electrical and Electronics Engineers, Orlando, Florida, July 11-16, 1999. Responsible person, Raine Simons, organization code 5640, (216) 433-3462.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Category: 33 This publication is available from the NASA Center for AeroSpace Information, (301) 621-0390.		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words) Future generation satellite communication systems in near-Earth orbit will operate at frequencies in the higher mm-wave frequency bands. These satellite systems require low-profile, high gain, light weight and low cost antennas for communications to and from Earth as well as for inter-satellite links (ISL). At higher mm-wave frequencies, the conductor loss of conventional microstrip line is high and consequently the feed network loss of patch antenna arrays is also high. The high loss lowers the array efficiency, and in addition lowers the G/T ratio in a receiving array. Recently a radial line slot antenna array has been demonstrated to have high gain and efficiency at 60 GHz. In this paper, the design, fabrication and characterization of a V-Band (50-75 GHz), cavity backed, circular aperture antenna with suspended substrate stripline (SSS) feed is presented.				
14. SUBJECT TERMS Suspended substrate stripline; Millimeter-wave antenna; Cavity backed antenna		15. NUMBER OF PAGES 11		
		16. PRICE CODE A03		
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	